

# HYDR8 2i

## COLD AND HOT WATER COOLER



**STATE-OF-THE-ART PURIFICATION TECHNOLOGY**  
On-board, multi-stage, reverse osmosis purification.



**OPTIMAL DISPENSE HEIGHT & AREA**  
Ergonomic design for “no-bend” dispensing.  
Spacious dispense area for larger refillable bottles.



**CLEANCONTACT™ ANTI-MICROBIAL TOUCHPAD**  
Organic anti-microbial coating helps maintain the cleanliness of touch-pad.



**24/7 SYSTEM MONITORING**  
Diagnostic center ensures system performance and water quality.



**DISPENSE AREA LIGHT**  
Enables precise dispensing and reduced likelihood of spillage.



**DENT-RESISTANT**  
Strong metal frame resists dents and damage.



**INDUSTRY-LEADING CERTIFICATIONS**  
The 2i Water Fill Station is manufactured in an ISO 9001/14001 facility and certified to meet UL standards.



Now available with touchless-dispense options!




132 32nd Street, Suite 210  
Brooklyn, New York, 11232

(718) 313-0113 | [www.hydr8.nyc](http://www.hydr8.nyc)



PHSI manufactures water purification equipment in a state-of-the-art ISO 9001/14001 facility. Our systems are tested and certified to the highest standards for safety and performance, including the UL certification.

# HYDR8 2i COLD AND HOT WATER COOLER

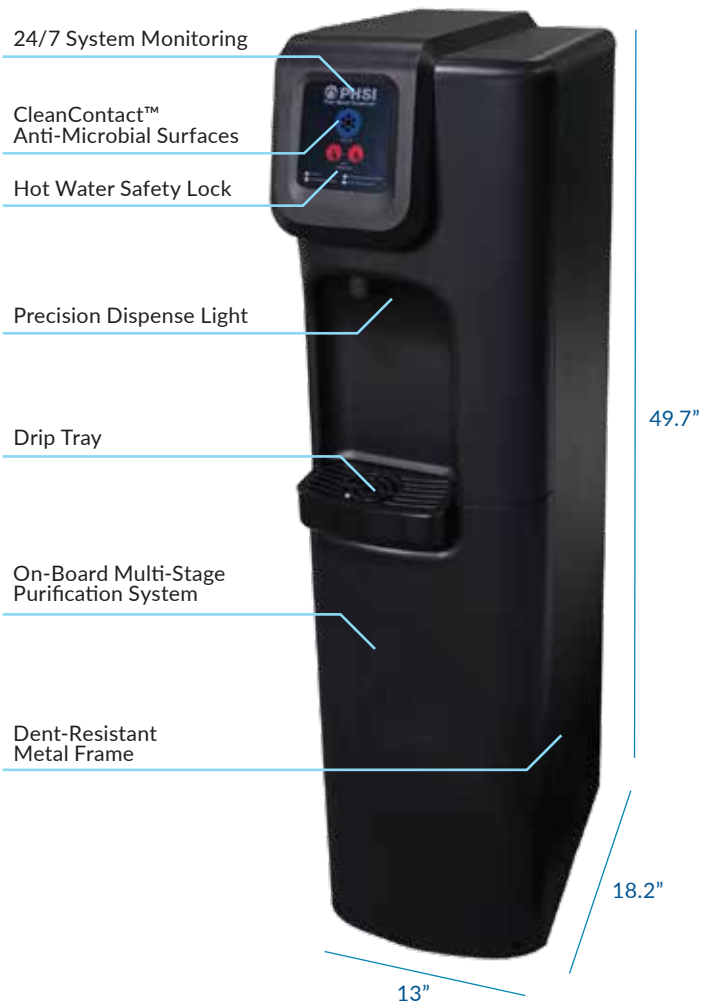

## Hydr8 2i Specifications

Description	Specification
Weight	62 lbs (28 kgs)
Dimensions	13" W x 18.2" D x 49.7" H (330.2mm W x 462.3mm D x 1262mm H)
Cold Tank Capacity	2.0 gallons (7.5 Liters)
Hot Tank Capacity	0.5 gallons (1.8 Liters)
Dispense Area	9" H (229mm H)
Reverse Osmosis Membrane Capacity	80 gallons per day
Reccomended Water Pressure	Do not exceed 60 psi
Rated Voltage/ Frequency	120v/60hz   220v/50hz
Power Consumption	Hot: 300W   Cold: 100W

## The Hydr8 Filtration Process



132 32nd Street, Suite 210  
Brooklyn, New York, 11232

(718) 313-0113 | [www.hydr8.nyc](http://www.hydr8.nyc)



PHSI manufactures water purification equipment in a state-of-the-art ISO 9001/14001 facility. Our systems are tested and certified to the highest standards for safety and performance, including the UL certification.