



HYDR8

UV88

HYDRATION STATIONS & WATER FOUNTAIN REPLACEMENTS



- Contactless Sensors
- Invigor8 PH & Electrolyte BOOST™
- NEW UV-Light Sterilization
- Single-Use Bottle Counter
- Reverse Osmosis Treatment



NEW UV-Light
 reduces 99.99% of pathogens
 at the point of dispense

Effective against:

- Legionella
- Cryptosporidium
- Giardia




Contactless Sensor Dispense



In-Wall / On-Wall

Featuring Freshield®

A silver-based antimicrobial compound to help protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew.

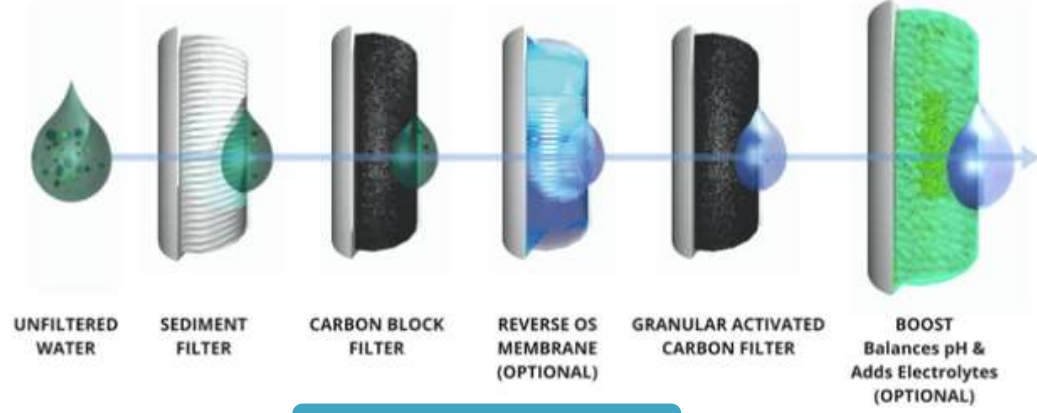

Purification Process

UV88 Models



1. UV88-COLD-IW

- in-wall, recessed with cold water (8 gallons/hour)

2. UV88-ZERO-IW

- in-wall, recessed non-refrigerated (ambient water)



SURFACE MOUNT

Doesn't need a cut-out for the unit to mount in the wall, only a small cut-out for the water line.

3. UV88-COLD-SM

- surface mount (bottom recess) with cold water (8 gallons/hour)

4. UV88-ZERO-SM

- surface mount (recess optional) non-refrigerated (ambient water)



5. UV88-COLD-OW

- on-wall with cold water (8 gallons/hour) - *no UVC-LED*

6. UV88-ZERO-OW

- on-wall non-refrigerated (ambient water)



7. UV88-COLD-F

- sensor fountain with cold water (8 gallons/hour)

8. UV88-ZERO-F

- sensor fountain non-refrigerated (ambient water)



UV88 Technical Sheet

Standard Features:

1. Hands-Free Sensors
2. Mercury-Free Waterways
3. UVC-LED Treatment at Dispense
4. Lead-Free Waterways
5. Built-in 100 Micron Strainer
 - stops particles before they enter waterway
6. 20 Second Shut Off
7. Integrated Bottle Counter
8. Filter Monitor
9. Product Certified:
 - to NSF/ANSI Standard 61-G & 372
 - to U.S. Safe Drinking Water Act
 - to UL 399
11. Comply with Americans with Disabilities Act





HYDR8

www.hydr8.us