

HYDR8

UV88 SERIES *HYDRATION STATIONS & WATER FOUNTAIN REPLACEMENTS*



- TOUCHLESS SENSOR SAFETY
- ALKALINE-ELECTROLYTE BOOST
- **NEW UV-LIGHT STERILIZATION**
- MEASURE YOUR ECO-IMPACT
- REVERSE OSMOSIS ACCESSIBLE



NEW UV-LIGHT
reduces 99.99% of pathogens
at the point of dispense

Effective against:

- Legionella
- Cryptosporidium
- Giardia



Contactless Sensor Dispensing




Featuring Freshield®

A silver-based antimicrobial compound to help protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew.



PURIFICATION PROCESS

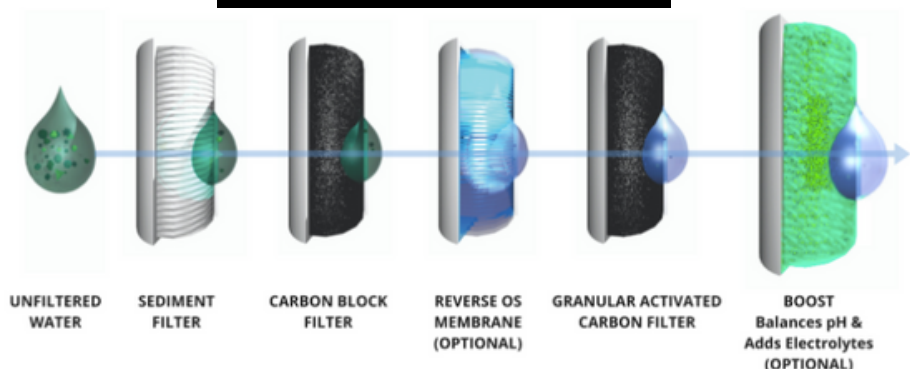

HYDR8 UV88 SERIES



1. UV88-COLD-IW

- in-wall, recessed with cold water (8 gallons/hour)

2. UV88-ZERO-IW

- in-wall, recessed non-refrigerated (ambient water)



SURFACE MOUNT

Doesn't need a cut-out for the unit to mount in the wall, only a small cut-out for the water line.



3. UV88-COLD-SM

- surface mount (bottom recess) with cold water (8 gallons/hour)

4. UV88-ZERO-SM

- surface mount (recess optional) non-refrigerated (ambient water)



5. UV88-ZERO-OW

- on-wall non-refrigerated (ambient water)

- cold water tank ordered separately but needs remote storage



6. UV88-COLD-F

- double sensor fountain with cold water (8 gallons/hour)

7. UV88-ZERO-F


- double sensor fountain non-refrigerated (ambient water)




UV88 Technical Sheet

Standard Features:

1. Hands-Free Sensors
2. Mercury-Free Waterways
3. UVC-LED Treatment at Dispense
4. Lead-Free Waterways
5. Built-in 100 Micron Strainer
 - stops particles before they enter waterway
6. 20 Second Shut Off
7. Integrated Bottle Counter
8. Filter Monitor
9. Product Certified:
 - to NSF/ANSI Standard 61-G & 372
 - to U.S. Safe Drinking Water Act
 - to UL 399
10. Comply with Americans with Disabilities Act



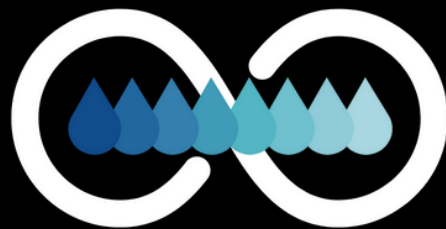

HYDR8

WWW.HYDR8.US